## CNW1-XXSXXANT Series DC/DC Converter



## **Typical Features**

- ◆ Fixed input voltage, isolated & regulated, output power 1.0W
- ◆ Efficiency up to 73% (Typ.)
- ◆ Mini SMD package, international standard pin-out
- ◆ Isolation Voltage 1500VDC
- ◆ Operating Temperature from -40°C to +85°C
- ◆ Plastic case, flame class UL94 V-0





**Test conditions:** Unless otherwise specified, all parameter values had been tested at nominal input voltage, pure resistive rated load, and at room temperature 25 °C.

## **Application Filed**

This series of converters can be widely used in the fields of instrument, communication, pure digital circuit, general low frequency analog circuit, relay drive circuit, data exchange circuit, etc.

Typical Product List											
Certificate			Voltage e (VDC)		utput e/Current	(mA @No	Current )Typ. minal age	Max. Capacit ive Load	Ripple & Noise 20MHz (mVp-p)	Efficion (%) (load/library)	@full Nom.
		Nom.	Range	Vo (VDC)	lo (mA) Max / Min	Full load	No Load	uF (Max)	Max/Typ	Min	Тур
-	CNW1-3V3S3V3ANT		3.135	3.3	250/20	290	8	2400	80/50	67	70
-	CNW1-3V3S05ANT	3.3	- 3.465	5	200/20	288	8	2400	80/50	69	72
-	CNW1-05S3V3ANT		4.75	3.3	250/25	290	6	2400	80/50	67	70
-	CNW1-05S05ANT	5 -	5	200/20	265	6	2400	80/50	70	73	
-	CNW1-05S12ANT		5.25	12	84/9	260	8	560	80/50	70	73
-	CNW1-12S3V3ANT		11.4	3.3	250/25	110	8	2400	80/50	67	70
-	CNW1-12S05ANT	12	_	5	200/20	108	8	2400	80/50	70	73
-	CNW1-12S12ANT	12.6	12	84/9	107	8	560	80/50	70	73	
-	CNW1-24S3V3ANT		22.8	3.3	250/25	56	8	2400	80/50	67	70
-	CNW1-24S05ANT	24	-	5	200/20	54	8	2400	80/50	70	73
-	CNW1-24S12ANT		25.2	12	84/9	52	8	560	80/50	70	73

Note - The ripple and noise are tested by the twisted pair method.

Input Specifications							
Item	Operating Condition	Min.	Тур.	Max.	Unit		
	3.3Vdc Input	-0.7		7			
Input inrush voltage (1Second Max.)	5Vdc Input	-0.7		9	Vdc		
input infusit voltage (13econd Max.)	9Vdc Input	-0.7		12	vac		
	12Vdc Input	-0.7		18			

# CNW1-XXSXXANT Series DC/DC Converter




	15Vdc Input	-0.7		21
	24Vdc Input	-0.7		30
Input Filter Type	Capacitor Filter			
Hot Plug	Unavailable			

Output Specifications							
Item	Operating Condition	Min.	Тур.	Max.	Unit		
Output Power		0.1		1.0	W		
Output Voltage Accuracy	Nominal input voltage, full load		±2	±3			
Load Regulation 10%-100% load				±3	%		
Line Regulation	Input voltage change ±1%			±0.25			
Temperature Drift Coefficient	Full load			±0.03	%/℃		
Short Circuit Protection	Continuous, S	Self-recovery					

<b>General Specifications</b>						
Item	Operating Condition	Min.	Тур.	Max.	Unit	
Switching Frequency	Nominal input voltage, full load		260		KHz	
Operating Temperature	Refer to the temperature derating curve	-40		+85		
Storage Temperature	Storage Temperature			+125	•6	
Case Temperature Rise	Case Temperature Rise Operating at Ta =25°C		30°		℃	
Pin Soldering Temperature	rin Soldering Temperature 1.5mm from the case, 10S			300		
Reflow Temperature	Reflow Temperature Peak temperature Tc≤250°C, the ma		above 217°C	is 60S		
Relative Humidity	No condensing	5		95	%RH	
Isolation Voltage	Input-Output, test 1min, leakage current <1mA	1500			VDC	
Insulation Resistance	Input-Output, @ 500Vdc	1000			ΜΩ	
Isolation Capacitor	Input/Output,100KHz/0.1V		20		pF	
MTBF	MIL-HDBK-217F@25°C	3500			K hours	
Vibration	Vibration 10-150Hz,10G,30Min, along X			X,Y,Z		
Case Material	Plastic in Black, flame	class UL94	V-0			
Product Weight	1.4 g (Typ.)					
Cooling Method	Natural air					

EMC Performance							
ENAL	CE	CISPR32/EN55032 CLASS B (with Recommended EMC Circuit)					
EMI	RE	CISPR32/EN55032 CLASS B (with Recommended EMC Circuit)					
EMS	ESD	IEC/EN61000-4-2 Air ±8kV, Contact ±4kV perf. Criteria B					



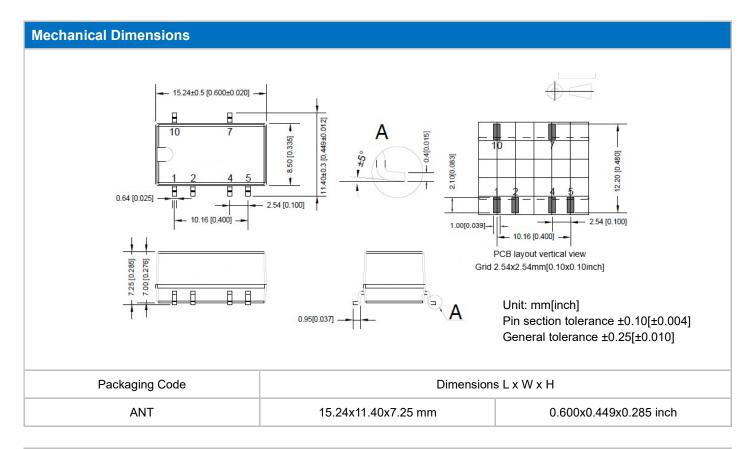


Pin-out Definit	Pin-out Definition								
Pin No.	1	2	4	5	7	10			
Pin definition	GND	+Vin	-Vo	-Vo	+Vo	NC			
Description	Input GND	Input V+	Output V-	Output V-	Output V+	No connection			


Note - Please take the pin definition on the product label marking as the right one if it is different than the one defined in this data sheet. Pin #10 NC should not be connected to any circuit.

## Ripple & Noise Test Instructions (Twisted Pair Method, 20MHz Bandwidth)

- 1. The Ripple & noise test need 12# twisted pair cables, an oscilloscope which bandwidth should be set to 20MHz, 0.1uF polypropylene capacitor and 10uF high-frequency low-resistance electrolytic capacitor are connected in parallel with the probes (100M bandwidth). The oscilloscope should be set at the Sample Mode.
- 2. The test diagram is shown on the right. The converter output connects to the electronic load by the jig with cables which size should be defined according to the output current value. The twisted pair (length 30cm±2 cm) should be connected in parallel with the load, the location is as close as possible to the output pins or terminals. The test can be started after input power on.

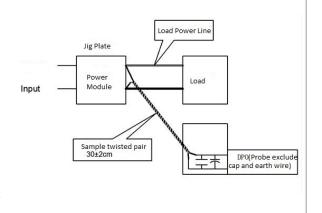



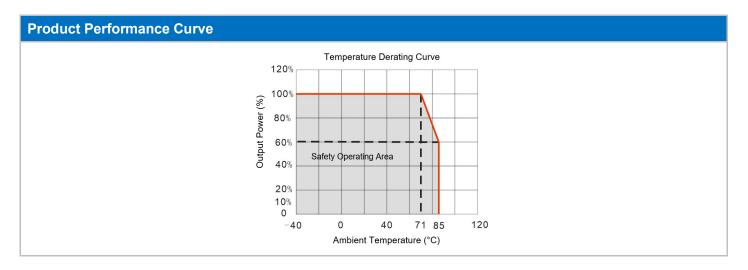


## **Recommended Circuits for Application**

#### ① Output load requirement

The maximum capacitive load of the product was tested at the Rated full load. The converter may not start or be damaged if the output capacitor exceeds this value.

#### 2 Recommended circuits for application


To effectively decrease the input and output ripple and noise, a capacitor filter should be connected at the input and output, the application circuit is shown in the figure below. The suitable filter capacitors should be chosen as the recommended capacitive load values in Table 1. The converter could not start if the capacitance is too big.

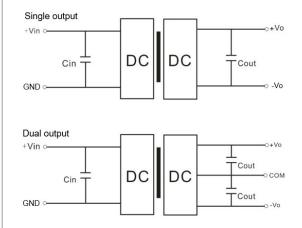

### Recommended Capacitive Load Value Table (Table 1)


Vin (Vdc)	Cin	Single Vout (Vdc)	Cout (µF)	Dual Vout (Vdc)	Cout (μF)
5	10 µ F/16V	3. 3	10 µ F/16V	±3.3	4.7 µF/16V
12	2. 2 µ F/25V	5	10 µ F/16V	±5	4.7 µF/16V
15	2. 2 µ F/25V	9	2. 2 µ F/25V	±9	2. 2 µ F/25V
24	1 µ F/50V	12	2. 2 µ F/25V	±12	1 µF/25V
		15	1 µ F/25V	±15	1μF/16V
		24	1 µF/50V	±24	0. 47 μF/50

#### **3** Recommended EMC Circuit

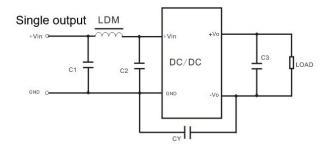

Input	voltage	5VDC	12/15/24VDC
	C1/C2	4. 7μF/16V	4. 7μF/50V
EMI	CY	270pF/2KV	270pF/2KV
EMI	С3	Refer to Cou	ut in Table 1
	LDM	6.8 µ H	6.8 µ H



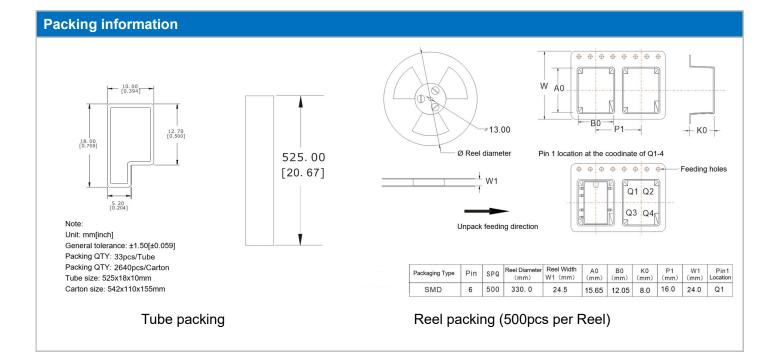

#### **Application Notice**

- 1. This product cannot be used in parallel, and it does not support hot-plugging.
- 2.The product performance in this manual cannot be guaranteed if it works at a lower load than the minimum load condition.
- 3. All values or indicators in this manual had been tested based on test specifications.