

# 0.6W EI30/5 APE3005 SERIES



## FEATURES

- Potted Under Vacuum
- Two compartments bobbin
- Self-extinguishing plastics UL94V-0
- Degree of protection IP67
- Weight: 0.04kg
- Temperature class to 40 °C/B


## OPTIONS

- Bulk packaging is standard
- Custom design available

## COMMON APPLICATIONS


- Medical equipments
- Industrial equipments
- Industrial controls
- Test equipments
- Industrial computers
- Avionics & telecom

## PHYSICAL CHARACTERISTICS

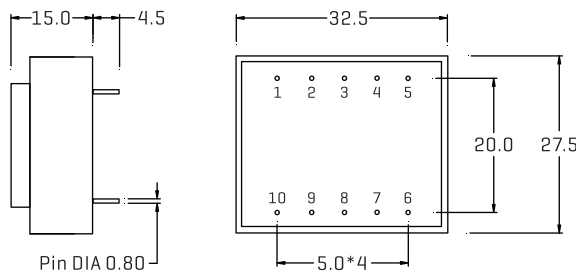

ALL DIMENSIONS IN MM

## TECHNICAL INFORMATION

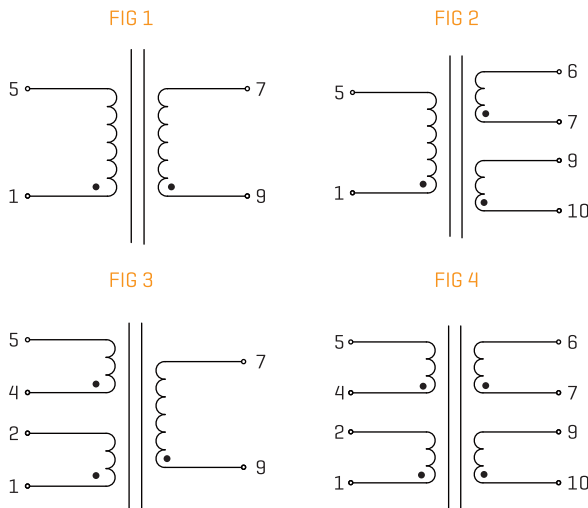

## ELECTRICAL CHARACTERISTICS AT 25°C

Part Number	Primary [V]	Secondary [V/mA]	No-load voltage[V]	Fig.
APE300513	230	6/100	9.94	1
APE300514	230	9/67	14.95	1
APE300515	230	12/50	19.9	1
APE300516	230	15/40	24.9	1
APE300517	230	18/33	29.9	1
APE300518	230	24/25	39.8	1
APE300519	230	2*6/50	2*9.94	2
APE300520	230	2*9/33	2*14.95	2
APE300521	230	2*12/25	2*19.9	2
APE300522	230	2*15/20	2*24.9	2
APE300523	230	2*18/17	2*29.9	2
APE300524	230	2*24/12	2*39.8	2
APE300525	115	6/100	9.94	1
APE300526	115	9/67	14.95	1
APE300527	115	12/50	19.9	1
APE300528	115	15/40	24.9	1
APE300529	115	18/33	29.9	1
APE300530	115	24/25	39.8	1
APE300531	115	2*6/50	2*9.94	2
APE300532	115	2*9/33	2*14.95	2
APE300533	115	2*12/25	2*19.9	2
APE300534	115	2*15/20	2*24.9	2
APE300535	115	2*18/17	2*29.9	2
APE300536	115	2*24/12	2*39.8	2
APE300537	2*115	6/100	9.94	3
APE300538	2*115	9/67	14.95	3
APE300539	2*115	12/50	19.9	3
APE300540	2*115	15/40	24.9	3
APE300541	2*115	18/33	29.9	3
APE300542	2*115	24/25	39.8	3
APE300543	2*115	2*6/50	2*9.94	4
APE300544	2*115	2*9/33	2*14.95	4
APE300545	2*115	2*12/25	2*19.9	4
APE300546	2*115	2*15/20	2*24.9	4
APE300547	2*115	2*18/17	2*29.9	4
APE300548	2*115	2*24/12	2*39.8	4