

# 1.4W EI30/8 APE3008 SERIES



## FEATURES

- Potted Under Vacuum
- Two compartments bobbins
- Self-extinguishing plastics UL94V-0
- Degree of protection IP67
- Weight: 0.06kg
- Temperature class to 70 °C/B


## OPTIONS

- Bulk packaging is standard
- Custom design available

## COMMON APPLICATIONS


- Medical equipments
- Industrial equipments
- Industrial controls
- Test equipments
- Industrial computers
- Avionics & telecom

## PHYSICAL CHARACTERISTICS

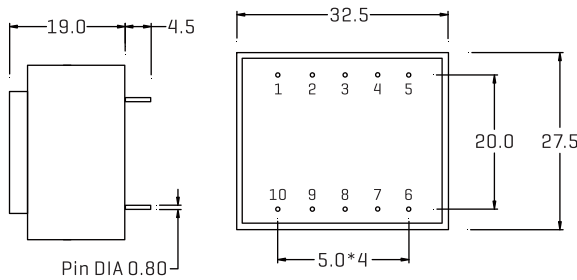

ALL DIMENSIONS IN MM

## TECHNICAL INFORMATION

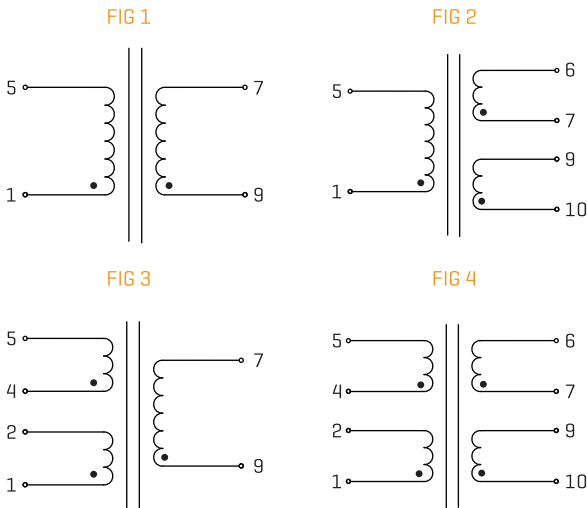

## ELECTRICAL CHARACTERISTICS AT 25°C

Part Number	Primary [V]	Secondary [V/mA]	No-load voltage[V]	Fig.
APE300810	230	6/233	11.0	1
APE300811	230	9/155	16.0	1
APE300812	230	12/116	21.0	1
APE300813	230	15/93	26.2	1
APE300814	230	18/77	30.5	1
APE300815	230	24/58	41.5	1
APE300816	230	2*6/116	2*11.0	2
APE300817	230	2*9/77	2*16.0	2
APE300818	230	2*12/58	2*21.0	2
APE300819	230	2*15/47	2*26.2	2
APE300820	230	2*18/39	2*30.5	2
APE300821	230	2*24/29	2*41.5	2
APE300822	115	6/233	11.0	1
APE300823	115	9/155	16.0	1
APE300824	115	12/116	21.0	1
APE300825	115	15/93	26.2	1
APE300826	115	18/77	30.5	1
APE300827	115	24/58	41.5	1
APE300828	115	2*6/116	2*11.0	2
APE300829	115	2*9/77	2*16.0	2
APE300830	115	2*12/58	2*21.0	2
APE300831	115	2*15/47	2*26.2	2
APE300832	115	2*18/39	2*30.5	2
APE300833	115	2*24/29	2*41.5	2
APE300834	2*115	6/233	11.0	3
APE300835	2*115	9/155	16.0	3
APE300836	2*115	12/116	21.0	3
APE300837	2*115	15/93	26.2	3
APE300838	2*115	18/77	30.5	3
APE300839	2*115	24/58	41.5	3
APE300840	2*115	2*6/116	2*11.0	4
APE300841	2*115	2*9/77	2*16.0	4
APE300842	2*115	2*12/58	2*21.0	4
APE300843	2*115	2*15/47	2*26.2	4
APE300844	2*115	2*18/39	2*30.5	4
APE300845	2*115	2*24/29	2*41.5	4