

# 2W EI30/15.5 APE3015 SERIES



## FEATURES

Two compartments bobbin  
 Self-extinguishing plastics UL94V-0  
 Degree of protection IP67  
 Weight: 0.1kg  
 Temperature class to 70°C/B

## OPTIONS


Bulk packaging is standard  
 Custom design available



## COMMON APPLICATIONS


Medical equipments  
 Industrial equipments  
 Industrial controls  
 Test equipments  
 Industrial computers  
 Avionics & telecom

## PHYSICAL CHARACTERISTICS

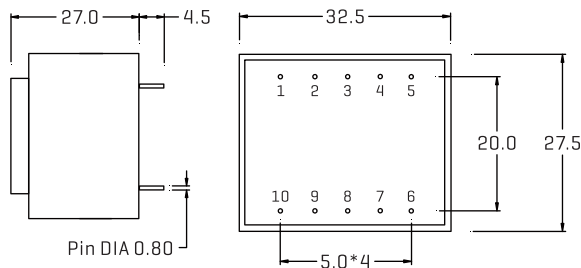

ALL DIMENSIONS IN MM

## TECHNICAL INFORMATION

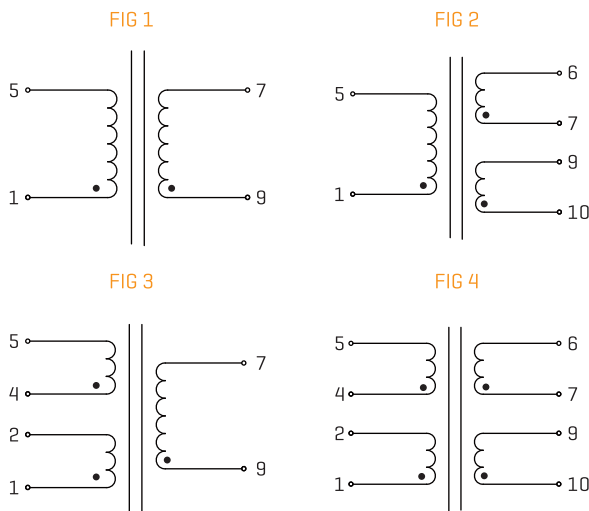

## ELECTRICAL CHARACTERISTICS AT 25°C

Part Number	Primary [V]	Secondary [V/mA]	No-load voltage[V]	Fig.
APE301521	230	6/333	10.4	1
APE301522	230	9/222	14.6	1
APE301523	230	12/167	20.0	1
APE301524	230	15/133	25.8	1
APE301525	230	18/111	29.6	1
APE301526	230	24/83	37.2	1
APE301527	230	2*6/167	2*10.4	2
APE301528	230	2*9/111	2*14.6	2
APE301529	230	2*12/83	2*20.0	2
APE301530	230	2*15/66	2*25.8	2
APE301531	230	2*18/55	2*29.6	2
APE301532	230	2*24/42	2*37.2	2
APE301533	115	6/333	10.4	1
APE301534	115	9/222	14.6	1
APE301535	115	12/167	20.0	1
APE301536	115	15/133	25.8	1
APE301537	115	18/111	29.6	1
APE301538	115	24/83	37.2	1
APE301539	115	2*6/167	2*10.4	2
APE301540	115	2*9/111	2*14.6	2
APE301541	115	2*12/83	2*20.0	2
APE301542	115	2*15/66	2*25.8	2
APE301543	115	2*18/55	2*29.6	2
APE301544	115	2*24/42	2*37.2	2
APE301545	2*115	6/333	10.4	3
APE301546	2*115	9/222	14.6	3
APE301547	2*115	12/167	20.0	3
APE301548	2*115	15/133	25.8	3
APE301549	2*115	18/111	29.6	3
APE301550	2*115	24/83	37.2	3
APE301551	2*115	2*6/167	2*10.4	4
APE301552	2*115	2*9/111	2*14.6	4
APE301553	2*115	2*12/83	2*20.0	4
APE301554	2*115	2*15/66	2*25.8	4
APE301555	2*115	2*18/55	2*29.6	4
APE301556	2*115	2*24/42	2*37.2	4

# 2W EI30/15.5 APE3015 SERIES



## FEATURES

- Vacuum filling
- Two compartments bobbin
- Self-extinguishing plastics UL94V-0
- Degree of protection IP 00
- Weight: 0.10kg
- Temperature class to 50 °C/B


## OPTIONS

- Bulk packaging is standard
- Custom design available

## COMMON APPLICATIONS

- Medical equipments
- Industrial equipments
- Industrial controls
- Test equipment
- Industrial computers
- Avionics & telecom

## PHYSICAL CHARACTERISTICS

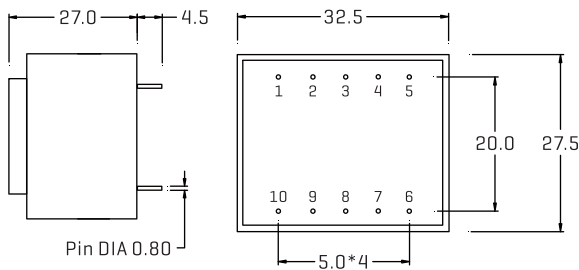


ALL DIMENSIONS IN MM


## ELECTRICAL CHARACTERISTICS AT 25°C

Part Number	Primary [V]	Secondary [V/mA]	No-load voltage[V]	Fig.
APE301557	230	6/384	10.5	1
APE301558	230	9/256	15.5	1
APE301559	230	12/192	21.0	1
APE301560	230	15/154	25.3	1
APE301561	230	18/128	31.0	1
APE301562	230	24/96	42.0	1
APE301563	230	2*6/192	2*10.5	2
APE301564	230	2*9/128	2*15.5	2
APE301565	230	2*12/96	2*21.0	2
APE301566	230	2*15/77	2*25.3	2
APE301567	230	2*18/64	2*31.0	2
APE301568	230	2*24/48	2*42.0	2
APE301569	115	6/384	10.5	1
APE301570	115	9/256	15.5	1
APE301571	115	12/192	21.0	1
APE301572	115	15/154	25.3	1
APE301573	115	18/128	31.0	1
APE301574	115	24/96	42.0	1
APE301575	115	2*6/192	2*10.5	2
APE301576	115	2*9/128	2*15.5	2
APE301577	115	2*12/96	2*21.0	2
APE301578	115	2*15/77	2*25.3	2
APE301579	115	2*18/64	2*31.0	2
APE301580	115	2*24/48	2*42.0	2
APE301581	2*115	6/384	10.5	3
APE301582	2*115	9/256	15.5	3
APE301583	2*115	12/192	21.0	3
APE301584	2*115	15/154	25.3	3
APE301585	2*115	18/128	31.0	3
APE301586	2*115	24/96	42.0	3
APE301587	2*115	2*6/192	2*10.5	4
APE301588	2*115	2*9/128	2*15.5	4
APE301589	2*115	2*12/96	2*21.0	4
APE301590	2*115	2*15/77	2*25.3	4
APE301591	2*115	2*18/64	2*31.0	4
APE301592	2*115	2*24/48	2*42.0	4

## TECHNICAL INFORMATION

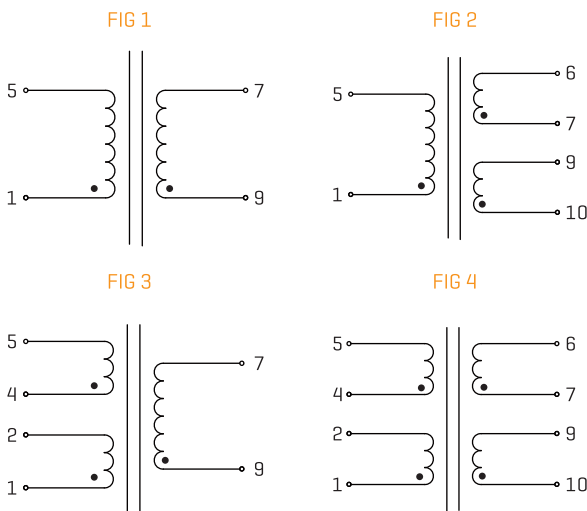

# 2W EI30/15.5 APE3015 SERIES



## FEATURES

- Vacuum filling
- Two compartments bobbin
- Self-extinguishing plastics UL94V-0
- Degree of protection IP 00
- Weight: 0.10kg
- Temperature class to 40 °C/B


## OPTIONS

- Bulk packaging is standard
- Custom design available

## COMMON APPLICATIONS


- Medical equipments
- Industrial equipments
- Industrial controls
- Test equipment
- Industrial computers
- Avionics & telecom

## PHYSICAL CHARACTERISTICS

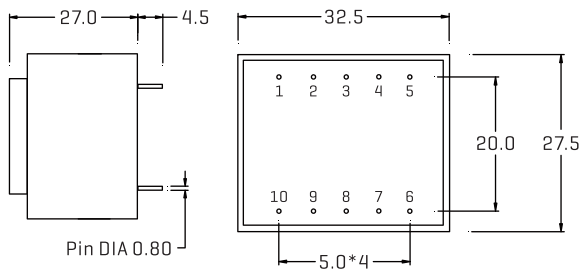

ALL DIMENSIONS IN MM

## TECHNICAL INFORMATION

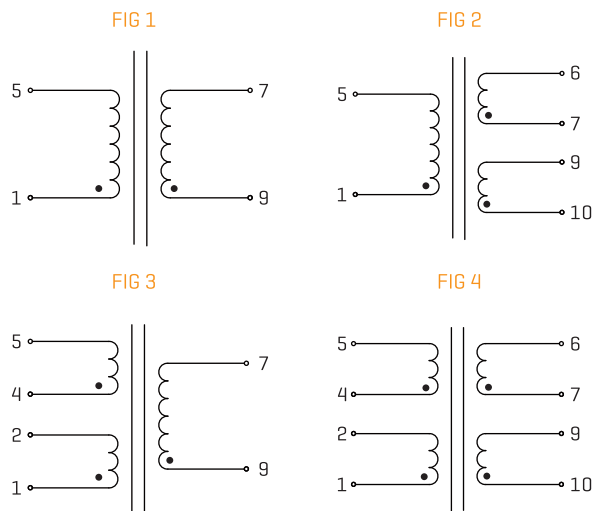

## ELECTRICAL CHARACTERISTICS AT 25°C

Part Number	Primary [V]	Secondary [V/mA]	No-load voltage[V]	Fig.
APE301593	230	6/400	10.5	1
APE301594	230	9/267	15.5	1
APE301595	230	12/200	21.0	1
APE301596	230	15/160	25.3	1
APE301597	230	18/133	31.0	1
APE301598	230	24/100	42.0	1
APE301599	230	2*6/200	2*10.5	2
APE3015100	230	2*9/133	2*15.5	2
APE3015101	230	2*12/100	2*21.0	2
APE3015102	230	2*15/80	2*25.3	2
APE3015103	230	2*18/67	2*31.0	2
APE3015104	230	2*24/50	2*42.0	2
APE3015105	115	6/400	10.5	1
APE3015106	115	9/267	15.5	1
APE3015107	115	12/200	21.0	1
APE3015108	115	15/160	25.3	1
APE3015109	115	18/133	31.0	1
APE3015110	115	24/100	42.0	1
APE3015111	115	2*6/200	2*10.5	2
APE3015112	115	2*9/133	2*15.5	2
APE3015113	115	2*12/100	2*21.0	2
APE3015114	115	2*15/80	2*25.3	2
APE3015115	115	2*18/67	2*31.0	2
APE3015116	115	2*24/50	2*42.0	2
APE3015117	2*115	6/400	10.5	3
APE3015118	2*115	9/267	15.5	3
APE3015119	2*115	12/200	21.0	3
APE3015120	2*115	15/160	25.3	3
APE3015121	2*115	18/133	31.0	3
APE3015122	2*115	24/100	42.0	3
APE3015123	2*115	2*6/200	2*10.5	4
APE3015124	2*115	2*9/133	2*15.5	4
APE3015125	2*115	2*12/100	2*21.0	4
APE3015126	2*115	2*15/80	2*25.3	4
APE3015127	2*115	2*18/67	2*31.0	4
APE3015128	2*115	2*24/50	2*42.0	4