

2.3W EI30/18 APE3018 SERIES



FEATURES

Two compartments bobbin
 Self-extinguishing plastics UL94V-0
 Degree of protection IP67
 Weight: 0.112kg
 Temperature class to 70°C/B


OPTIONS

Bulk packaging is standard
 Custom design available

COMMON APPLICATIONS


Medical equipments
 Industrial equipments
 Industrial controls
 Test equipments
 Industrial computers
 Avionics & telecom

PHYSICAL CHARACTERISTICS

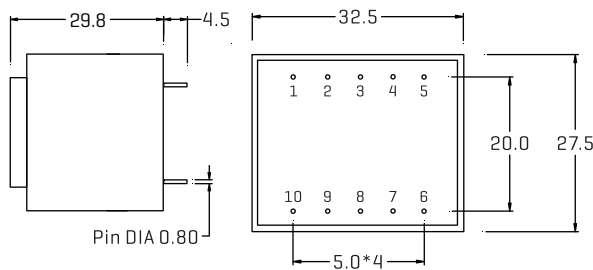

ALL DIMENSIONS IN MM

TECHNICAL INFORMATION

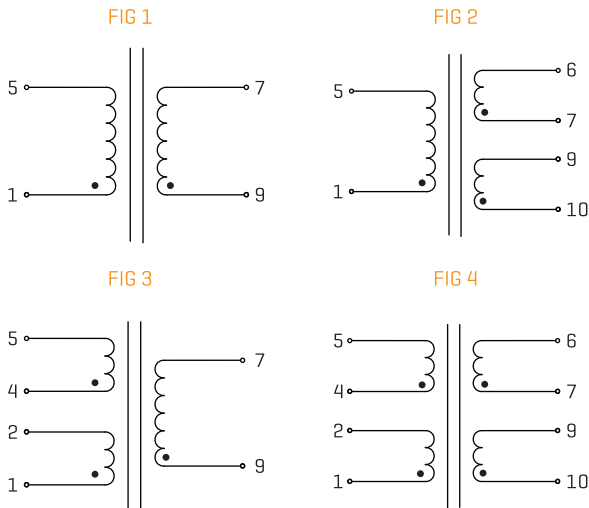

ELECTRICAL CHARACTERISTICS AT 25°C

Part Number	Primary [V]	Secondary [V/mA]	No-load voltage[V]	Fig.
APE301857	230	6/384	10.0	1
APE301858	230	9/256	13.8	1
APE301859	230	12/192	18.6	1
APE301860	230	15/154	23.8	1
APE301861	230	18/128	27.8	1
APE301862	230	24/96	34.7	1
APE301863	230	2*6/192	2*10.0	2
APE301864	230	2*9/128	2*14.0	2
APE301865	230	2*12/96	2*17.5	2
APE301866	230	2*15/77	2*24.4	2
APE301867	230	2*18/64	2*29.3	2
APE301868	230	2*24/48	2*35.8	2
APE301869	115	6/384	10.0	1
APE301870	115	9/256	13.8	1
APE301871	115	12/192	18.6	1
APE301872	115	15/154	23.8	1
APE301873	115	18/128	27.8	1
APE301874	115	24/96	34.7	1
APE301875	115	2*6/192	2*10.0	2
APE301876	115	2*9/128	2*14.0	2
APE301877	115	2*12/96	2*17.5	2
APE301878	115	2*15/77	2*24.4	2
APE301879	115	2*18/64	2*29.3	2
APE301880	115	2*24/48	2*35.8	2
APE301881	2*115	6/384	10.0	3
APE301882	2*115	9/256	13.8	3
APE301883	2*115	12/192	18.6	3
APE301884	2*115	15/154	23.8	3
APE301885	2*115	18/128	27.8	3
APE301886	2*115	24/96	34.7	3
APE301887	2*115	2*6/192	2*10.0	4
APE301888	2*115	2*9/128	2*14.0	4
APE301889	2*115	2*12/96	2*17.5	4
APE301890	2*115	2*15/77	2*24.4	4
APE301891	2*115	2*18/64	2*29.3	4
APE301892	2*115	2*24/48	2*35.8	4

2.3W EI30/18 APE3018 SERIES



FEATURES

- Vacuum filling
- Two compartments bobbin
- Self-extinguishing plastics UL94V-0
- Degree of protection IP 00
- Weight: 0.112kg
- Temperature class to 50 °C/B


OPTIONS

- Bulk packaging is standard
- Custom design available

COMMON APPLICATIONS


- Medical equipments
- Industrial equipments
- Industrial controls
- Test equipment
- Industrial computers
- Avionics & telecom

PHYSICAL CHARACTERISTICS

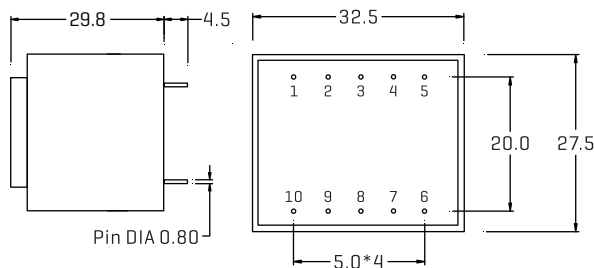

ALL DIMENSIONS IN MM

TECHNICAL INFORMATION

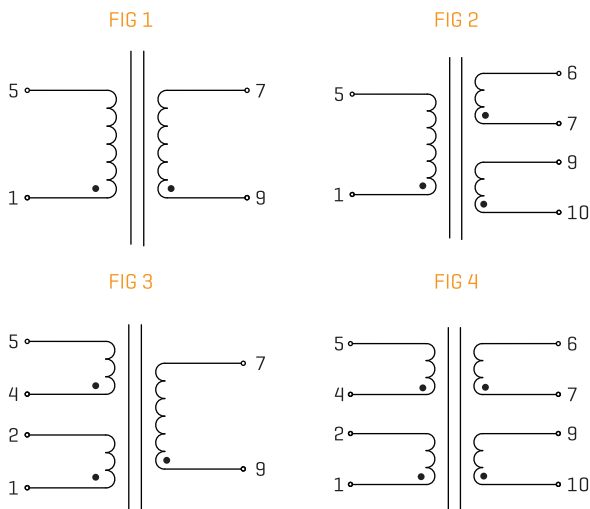

ELECTRICAL CHARACTERISTICS AT 25°C

Part Number	Primary [V]	Secondary [V/mA]	No-load voltage[V]	Fig.
APE301893	230	6/450	10.5	1
APE301894	230	9/300	15.4	1
APE301895	230	12/225	21.1	1
APE301896	230	15/180	26.3	1
APE301897	230	18/150	30.9	1
APE301898	230	24/113	42	1
APE301899	230	2*6/225	2*10.5	2
APE3018100	230	2*9/150	2*15.4	2
APE3018101	230	2*12/113	2*21.1	2
APE3018102	230	2*15/90	2*26.3	2
APE3018103	230	2*18/75	2*30.9	2
APE3018104	230	2*24/57	2*42.0	2
APE3018105	115	6/450	10.5	1
APE3018106	115	9/300	15.4	1
APE3018107	115	12/225	21.1	1
APE3018108	115	15/180	26.3	1
APE3018109	115	18/150	30.9	1
APE3018110	115	24/113	42	1
APE3018111	115	2*6/225	2*10.5	2
APE3018112	115	2*9/150	2*15.4	2
APE3018113	115	2*12/113	2*21.1	2
APE3018114	115	2*15/90	2*26.3	2
APE3018115	115	2*18/75	2*30.9	2
APE3018116	115	2*24/57	2*42.0	2
APE3018117	2*115	6/450	10.5	3
APE3018118	2*115	9/300	15.4	3
APE3018119	2*115	12/225	21.1	3
APE3018120	2*115	15/180	26.3	3
APE3018121	2*115	18/150	30.9	3
APE3018122	2*115	24/113	42	3
APE3018123	2*115	2*6/225	2*10.5	4
APE3018124	2*115	2*9/150	2*15.4	4
APE3018125	2*115	2*12/113	2*21.1	4
APE3018126	2*115	2*15/90	2*26.3	4
APE3018127	2*115	2*18/75	2*30.9	4
APE3018128	2*115	2*24/57	2*42.0	4

2.3W EI30/18 APE3018 SERIES



FEATURES

- Vacuum filling
- Two compartments bobbin
- Self-extinguishing plastics UL94V-0
- Degree of protection IP 00
- Weight: 0.112kg
- Temperature class to 40 °C/B


OPTIONS

- Bulk packaging is standard
- Custom design available

COMMON APPLICATIONS


- Medical equipments
- Industrial equipments
- Industrial controls
- Test equipment
- Industrial computers
- Avionics & telecom

PHYSICAL CHARACTERISTICS

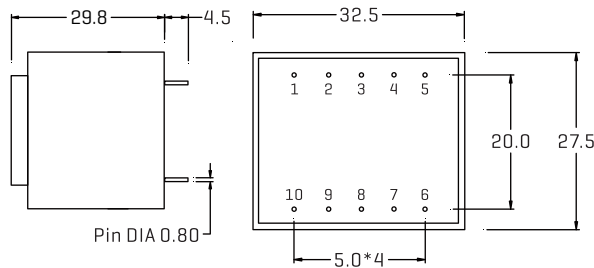

ALL DIMENSIONS IN MM

TECHNICAL INFORMATION

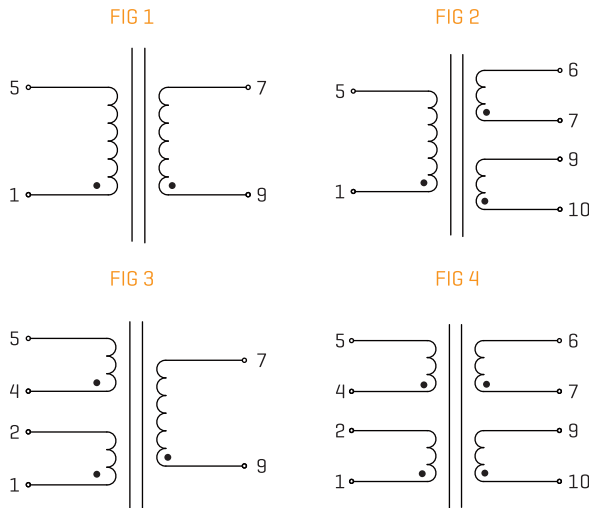

ELECTRICAL CHARACTERISTICS AT 25°C

Part Number	Primary [V]	Secondary [V/mA]	No-load voltage[V]	Fig.
APE3018129	230	6/467	10.5	1
APE3018130	230	9/311	15.4	1
APE3018131	230	12/233	21.1	1
APE3018132	230	15/187	26.3	1
APE3018133	230	18/156	30.9	1
APE3018134	230	24/117	42	1
APE3018135	230	2*6/233	2*10.5	2
APE3018136	230	2*9/156	2*15.4	2
APE3018137	230	2*12/117	2*21.1	2
APE3018138	230	2*15/93	2*26.3	2
APE3018139	230	2*18/77	2*30.9	2
APE3018140	230	2*24/58	2*42.0	2
APE3018141	115	6/467	10.5	1
APE3018142	115	9/311	15.4	1
APE3018143	115	12/233	21.1	1
APE3018144	115	15/187	26.3	1
APE3018145	115	18/156	30.9	1
APE3018146	115	24/117	42	1
APE3018147	115	2*6/233	2*10.5	2
APE3018148	115	2*9/156	2*15.4	2
APE3018149	115	2*12/117	2*21.1	2
APE3018150	115	2*15/93	2*26.3	2
APE3018151	115	2*18/77	2*30.9	2
APE3018152	115	2*24/58	2*42.0	2
APE3018153	2*115	6/467	10.5	3
APE3018154	2*115	9/311	15.4	3
APE3018155	2*115	12/233	21.1	3
APE3018156	2*115	15/187	26.3	3
APE3018157	2*115	18/156	30.9	3
APE3018158	2*115	24/117	42	3
APE3018159	2*115	2*6/233	2*10.5	4
APE3018160	2*115	2*9/156	2*15.4	4
APE3018161	2*115	2*12/117	2*21.1	4
APE3018162	2*115	2*15/93	2*26.3	4
APE3018163	2*115	2*18/77	2*30.9	4
APE3018164	2*115	2*24/58	2*42.0	4