

10W EI48/16.8 APE4816 SERIES



FEATURES

- Two compartments bobbin
- Self-extinguishing plastics UL94V-0
- Degree of protection IP67
- Weight: 0.3kg
- Temperature class to 40 °C/B


OPTIONS

- Bulk packaging is standard
- Custom design available

COMMON APPLICATIONS


- Medical equipments
- Industrial equipments
- Industrial controls
- Test equipments
- Industrial computers
- Avionics & telecom

PHYSICAL CHARACTERISTICS

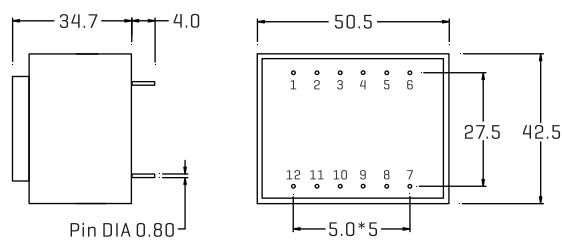

ALL DIMENSIONS IN MM

TECHNICAL INFORMATION

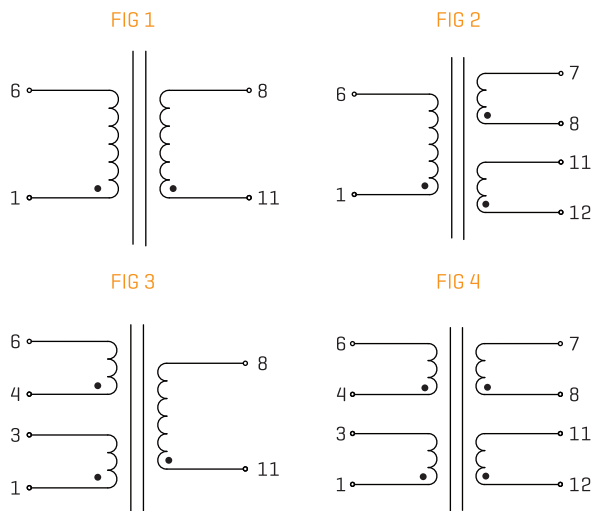

ELECTRICAL CHARACTERISTICS AT 25°C

Part Number	Primary [V]	Secondary [V/mA]	No-load voltage[V]	Fig.
APE481665	230	6/1666	7.9	1
APE481666	230	9/1111	12.0	1
APE481667	230	12/834	14.7	1
APE481668	230	15/666	19.2	1
APE481669	230	18/555	22.9	1
APE481670	230	24/416	30.6	1
APE481671	230	2*6/834	2*8.1	2
APE481672	230	2*9/555	2*11.6	2
APE481673	230	2*12/416	2*15.7	2
APE481674	230	2*15/333	2*19.5	2
APE481675	230	2*18/277	2*23.5	2
APE481676	230	2*24/208	2*30.0	2
APE481677	115	6/1666	7.9	1
APE481678	115	9/1111	12.0	1
APE481679	115	12/834	14.7	1
APE481680	115	15/666	19.2	1
APE481681	115	18/555	22.9	1
APE481682	115	24/416	30.6	1
APE481683	115	2*6/834	2*8.1	2
APE481684	115	2*9/555	2*11.6	2
APE481685	115	2*12/416	2*15.7	2
APE481686	115	2*15/333	2*19.5	2
APE481687	115	2*18/277	2*23.5	2
APE481688	115	2*24/208	2*30.0	2
APE481689	2*115	6/1666	7.9	3
APE481690	2*115	9/1111	12.0	3
APE481691	2*115	12/834	14.7	3
APE481692	2*115	15/666	19.2	3
APE481693	2*115	18/555	22.9	3
APE481694	2*115	24/416	30.6	3
APE481695	2*115	2*6/834	2*8.1	4
APE481696	2*115	2*9/555	2*11.6	4
APE481697	2*115	2*12/416	2*15.7	4
APE481698	2*115	2*15/333	2*19.5	4
APE481699	2*115	2*18/277	2*23.5	4
APE4816100	2*115	2*24/208	2*30.0	4