

# 16W EI54/18.8 APE5418 SERIES



## FEATURES

Two compartments bobbin  
 Self-extinguishing plastics UL94V-0  
 Degree of protection IP67  
 Weight: 0.42kg  
 Temperature class to 40 °C/B


## OPTIONS

Bulk packaging is standard  
 Custom design available

## COMMON APPLICATIONS


Medical equipments  
 Industrial equipments  
 Industrial controls  
 Test equipments  
 Industrial computers  
 Avionics & telecom

## PHYSICAL CHARACTERISTICS

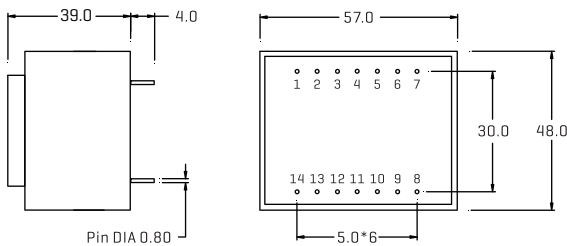

ALL DIMENSIONS IN MM

## TECHNICAL INFORMATION

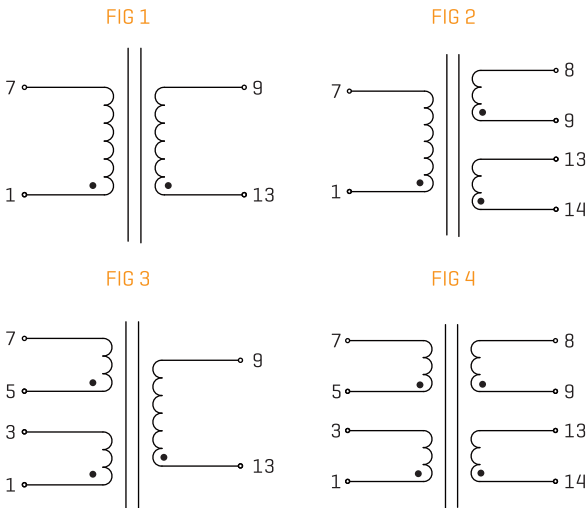

## ELECTRICAL CHARACTERISTICS AT 25°C

Part Number	Primary [V]	Secondary [V/mA]	No-load voltage[V]	Fig.
APE541801	230	6/2666	7.6	1
APE541802	230	9/1777	11.3	1
APE541803	230	12/1333	15.0	1
APE541804	230	15/1066	18.4	1
APE541805	230	18/888	22.4	1
APE541806	230	24/666	29.6	1
APE541807	230	2*6/1333	2*7.6	2
APE541808	230	2*9/888	2*11.3	2
APE541809	230	2*12/666	2*15.0	2
APE541810	230	2*15/533	2*18.4	2
APE541811	230	2*18/444	2*22.4	2
APE541812	230	2*24/333	2*29.0	2
APE541813	115	6/2666	7.6	1
APE541814	115	9/1777	11.3	1
APE541815	115	12/1333	15.0	1
APE541816	115	15/1066	18.4	1
APE541817	115	18/888	22.4	1
APE541818	115	24/666	29.6	1
APE541819	115	2*6/1333	2*7.6	2
APE541820	115	2*9/888	2*11.3	2
APE541821	115	2*12/666	2*15.0	2
APE541822	115	2*15/533	2*18.4	2
APE541823	115	2*18/444	2*22.4	2
APE541824	115	2*24/333	2*29.0	2
APE541825	2*115	6/2666	7.6	3
APE541826	2*115	9/1777	11.3	3
APE541827	2*115	12/1333	15.0	3
APE541828	2*115	15/1066	18.4	3
APE541829	2*115	18/888	22.4	3
APE541830	2*115	24/666	29.6	3
APE541831	2*115	2*6/1333	2*7.6	4
APE541832	2*115	2*9/888	2*11.3	4
APE541833	2*115	2*12/666	2*15.0	4
APE541834	2*115	2*15/533	2*18.4	4
APE541835	2*115	2*18/444	2*22.4	4
APE541836	2*115	2*24/333	2*29.0	4