

25W EI60/25.5 APE6025H SERIES



FEATURES

Frequency 50/60Hz
 Potted under vacuum
 Split-bobbin
 Temperature class ta 40°C/B
 Weight: 0.67kg
 Packaging unit: 6 pieces [tray]

OPTIONS

Bulk packaging is standard
 Custom design available


COMMON APPLICATIONS

Medical equipments
 Industrial equipments
 Industrial controls
 Test equipments
 Industrial computers
 Avionics & telecom

ELECTRICAL CHARACTERISTICS AT 25°C

Part Number	Primary [V]	Secondary [V/mA]	No-load voltage[V]	Fig.	Part Number	Primary [V]	Secondary [V/mA]	No-load voltage[V]	Fig.
APE602501H	230	6/4170	6.9	1	APE602511H	2*115	6/4170	6.9	3
APE602502H	230	9/2780	10.3	1	APE602512H	2*115	9/2780	10.3	3
APE602503H	230	12/2080	13.6	1	APE602513H	2*115	12/2080	13.6	3
APE602504H	230	15/1670	17	1	APE602514H	2*115	15/1670	17	3
APE602505H	230	18/1390	20.5	1	APE602515H	2*115	18/1390	20.5	3
APE602506H	230	24/1040	27	1	APE602516H	2*115	24/1040	27	3
APE602507H	230	2*6/2080	2*6.9	2	APE602517H	2*115	2*6/2080	2*6.9	4
APE602508H	230	2*9/1390	2*10.5	2	APE602518H	2*115	2*9/1390	2*10.5	4
APE602509H	230	2*12/1040	2*13.6	2	APE602519H	2*115	2*12/1040	2*13.6	4
APE602510H	230	2*15/830	2*17.3	2	APE602520H	2*115	2*15/830	2*17.3	4

PHYSICAL CHARACTERISTICS

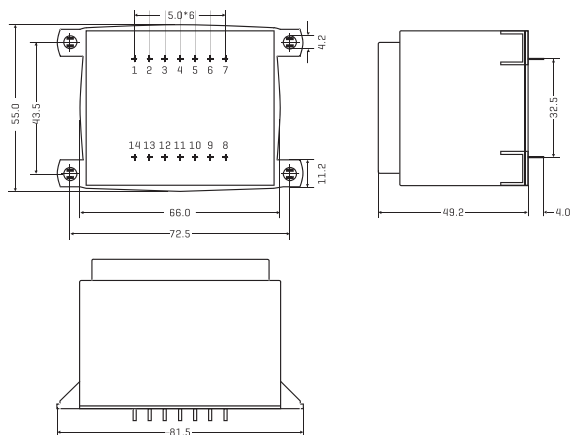

ALL DIMENSIONS IN MM

TECHNICAL INFORMATION

