

36W EI66/23 APE6623H SERIES



FEATURES

Frequency 50/60Hz
 Potted under vacuum
 Split-bobbin
 Temperature class ta 40°C/B
 Weight: 0.75kg
 Packaging unit: 6 pieces [tray]

OPTIONS

Bulk packaging is standard
 Custom design available


COMMON APPLICATIONS

Medical equipments
 Industrial equipments
 Industrial controls
 Test equipments
 Industrial computers
 Avionics & telecom

ELECTRICAL CHARACTERISTICS AT 25°C

Part Number	Primary [V]	Secondary [V/mA]	No-load voltage[V]	Fig.	Part Number	Primary [V]	Secondary [V/mA]	No-load voltage[V]	Fig.
APE662301H	230	6/6000	6.9	1	APE662311H	2*115	6/6000	6.9	3
APE662302H	230	9/4000	10.3	1	APE662312H	2*115	9/4000	10.3	3
APE662303H	230	12/3000	13.6	1	APE662313H	2*115	12/3000	13.6	3
APE662304H	230	15/2400	17	1	APE662314H	2*115	15/2400	17	3
APE662305H	230	18/2000	20.5	1	APE662315H	2*115	18/2000	20.5	3
APE662306H	230	24/1500	27	1	APE662316H	2*115	24/1500	27	3
APE662307H	230	2*6/3000	2*6.9	2	APE662317H	2*115	2*6/3000	2*6.9	4
APE662308H	230	2*9/2000	2*10.5	2	APE662318H	2*115	2*9/2000	2*10.5	4
APE662309H	230	2*12/1500	2*13.6	2	APE662319H	2*115	2*12/1500	2*13.6	4
APE662310H	230	2*15/1200	2*17.3	2	APE662320H	2*115	2*15/1200	2*17.3	4

PHYSICAL CHARACTERISTICS

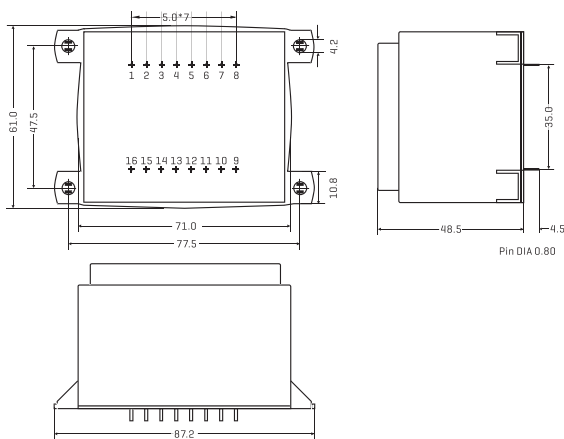

ALL DIMENSIONS IN MM

TECHNICAL INFORMATION

