


2W UI30/5.5 AUI3005 SERIES



FEATURES

Frequency 50/60Hz
 Potted under vacuum
 Split-bobbin
 Temperature class ta 70°C/B
 Weight: 0.115kg
 Packaging unit: 15 pieces [tray]
 Fixing material for 2.5mm [0.098 inch]
 Self-tapping screws: DIN 7513 [M 3x8]
 Sheet-metal screws: DIN 7971 [2.9x6.5]


OPTIONS

Bulk packaging is standard
 Custom design available

COMMON APPLICATIONS

Medical equipments
 Industrial equipments
 Industrial controls
 Test equipments
 Industrial computers
 Avionics & telecom


PHYSICAL CHARACTERISTICS

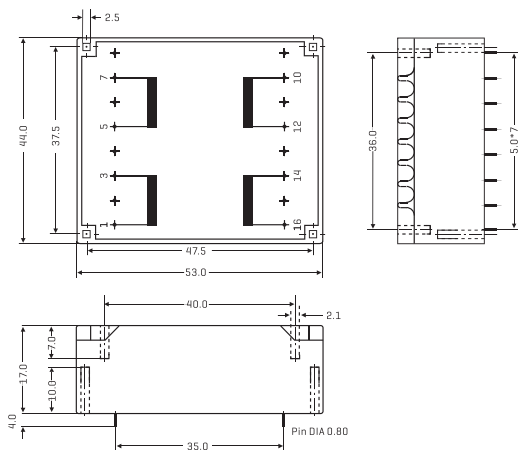

ELECTRICAL CHARACTERISTICS AT 25°C

Part Number	Primary (V)	Secondary (V/mA)	No-load voltage(V)
AUI300507	2*115	2*6/166	2*10.2
AUI300508	2*115	2*9/111	2*15.3
AUI300509	2*115	2*12/83	2*20.4
AUI300510	2*115	2*15/66	2*25.5
AUI300511	2*115	2*18/55	2*30.6
AUI300512	2*115	2*24/42	2*40.8

TECHNICAL INFORMATION

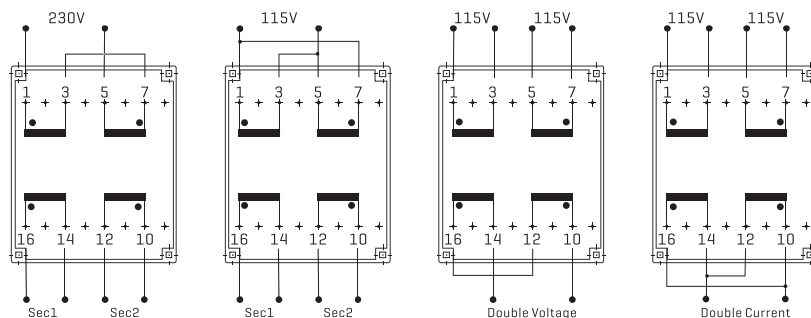

ALL DIMENSIONS IN MM

2W UI30/5.5 AUI3005 SERIES



FEATURES

Frequency 50/60Hz
 Potted under vacuum
 Split-bobbin
 Temperature class ta 50°C/B
 Weight: 0.115kg
 Packaging unit: 15 pieces [tray]
 Fixing material for 2.5mm [0.098 inch]
 Self-tapping screws: DIN 7513 [M 3x8]
 Sheet-metal screws: DIN 7971 [2.9x6.5]


OPTIONS

Bulk packaging is standard
 Custom design available

COMMON APPLICATIONS

Medical equipments
 Industrial equipments
 Industrial controls
 Test equipments
 Industrial computers
 Avionics & telecom


PHYSICAL CHARACTERISTICS

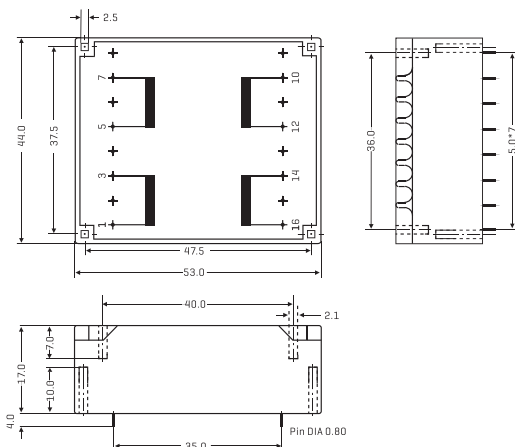

ELECTRICAL CHARACTERISTICS AT 25°C

Part Number	Primary [V]	Secondary [V/mA]	No-load voltage[V]
AUI300513	2*115	2*6/250	2* 9.8
AUI300514	2*115	2*9/167	2*14.7
AUI300515	2*115	2*12/125	2*19.6
AUI300516	2*115	2*15/100	2*24.5
AUI300517	2*115	2*18/83	2*29.5
AUI300518	2*115	2*24/63	2*39.3

TECHNICAL INFORMATION

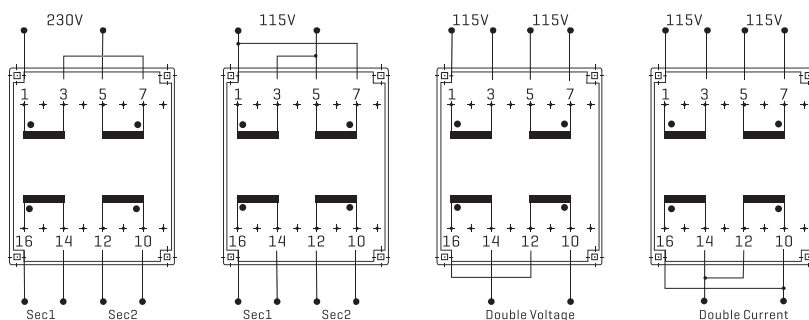

ALL DIMENSIONS IN MM