

14W UI39/10.2 AUI3910 SERIES



FEATURES

Frequency 50/60Hz
 Potted under vacuum
 Split-bobbin
 Temperature class ta 40°C/B
 Weight: 0.315kg
 Packaging unit: 10 pieces (tray)
 Fixing material for: 2.5mm [0.098 inch]
 Self-tapping screws: DIN 7513 [M 3x8]
 Sheet-metal screws: DIN 7971 [2.9x6.5]


OPTIONS

Bulk packaging is standard
 Custom design available

COMMON APPLICATIONS

Medical equipments
 Industrial equipments
 Industrial controls
 Test equipments
 Industrial computers
 Avionics & telecom


PHYSICAL CHARACTERISTICS



ELECTRICAL CHARACTERISTICS AT 25°C

| Part Number | Primary [V] | Secondary [V/mA] | No-load voltage[V] |
|-------------|-------------|------------------|--------------------|
| AUI391043 | 2*115 | 2*6/1166 | 2*7.5 |
| AUI391044 | 2*115 | 2*9/778 | 2*11.2 |
| AUI391045 | 2*115 | 2*12/563 | 2*15.0 |
| AUI391046 | 2*115 | 2*15/467 | 2*18.8 |
| AUI391047 | 2*115 | 2*18/389 | 2*22.4 |
| AUI391048 | 2*115 | 2*24/292 | 2*30.0 |

TECHNICAL INFORMATION

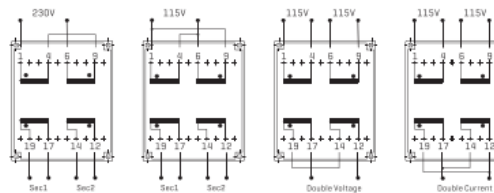

ALL DIMENSIONS IN MM