

# 18W UI39/13.5 AUI3913 SERIES



## FEATURES

Frequency 50/60Hz  
 Potted under vacuum  
 Split-bobbin  
 Temperature class ta 40°C/B  
 Weight: 0.375kg  
 Packaging unit: 10 pieces (tray)  
 Fixing material for 2.5mm (0.098 inch)  
 Self-tapping screws: DIN 7513 (M 3x6)  
 Sheet-metal screws: DIN 7971 (2.9x6.5)


## OPTIONS

Bulk packaging is standard  
 Custom design available

## COMMON APPLICATIONS

Medical equipments  
 Industrial equipments  
 Industrial controls  
 Test equipments  
 Industrial computers  
 Avionics & telecom


## PHYSICAL CHARACTERISTICS



## ELECTRICAL CHARACTERISTICS AT 25°C

Part Number	Primary [V]	Secondary [V/mA]	No-load voltage[V]
AUI391349	2*115	2*6/1500	2*7.7
AUI391350	2*115	2*9/1000	2*11.3
AUI391351	2*115	2*12/750	2*15.3
AUI391352	2*115	2*15/600	2*19.4
AUI391353	2*115	2*18/500	2*22.5
AUI391354	2*115	2*24/375	2*30.6

## TECHNICAL INFORMATION

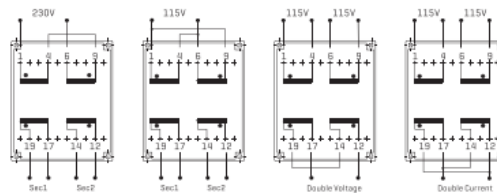

ALL DIMENSIONS IN MM