


C13DSC-2W SERIES DC DC Converter 2Watt

1.5KV & 3KV Isolated Single Output SMD14



FEATURES :

- 14PIN SMD Package
- No-load input current as low as 5mA
- Continuous short-circuit protection
- High Efficiency up to 89%
- Unregulated Output Types
- 1.5KVDC & 3KVDC Isolation
- Operating Temperature:-40°C TO +105°C
- Industry Standard Pinout
- Design refer to IEC62368, UL62368, EN62368

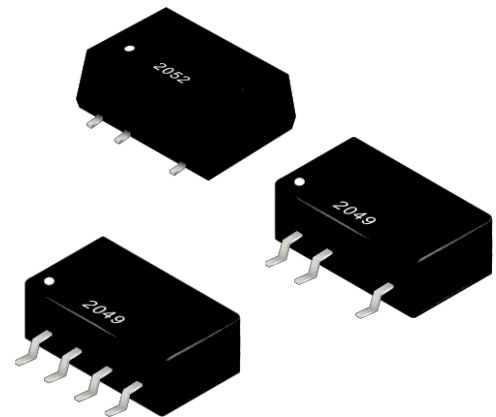


Specifications typical at TA=25°C, nominal input voltage and rated output current unless otherwise specified

Part Number	Output Voltage	Output Current	Efficiency	Capacitive Load(μF)	Package Style
	Vdc	mA	%TYP	Max.	
C13DSC-12S05NXP2 ^(H3)	5	400	85	2400	1/2/3
C13DSC-12S09NXP2 ^(H3)	9	223	87	820	1/2/3
C13DSC-12S12NXP2 ^(H3)	12	167	87	470	1/2/3
C13DSC-12S15NXP2 ^(H3)	15	133	88	220	1/2/3
C13DSC-12S24NXP2 ^(H3)	24	84	89	100	3
C13DSC-15S05NXP2 ^(H3)	5	400	85	2400	1/2/3
C13DSC-15S09NXP2 ^(H3)	9	223	87	820	1/2/3
C13DSC-15S12NXP2 ^(H3)	12	167	87	470	1/2/3
C13DSC-15S15NXP2 ^(H3)	15	133	88	220	1/2/3
C13DSC-15S24NXP2 ^(H3)	24	84	89	100	3
C13DSC-24S05NXP2 ^(H3)	5	400	85	2400	3
C13DSC-24S09NXP2 ^(H3)	9	223	87	820	3
C13DSC-24S12NXP2 ^(H3)	12	167	87	470	3
C13DSC-24S15NXP2 ^(H3)	15	133	88	220	3
C13DSC-24S24NXP2 ^(H3)	24	84	89	100	3



Temperature Derating Graph

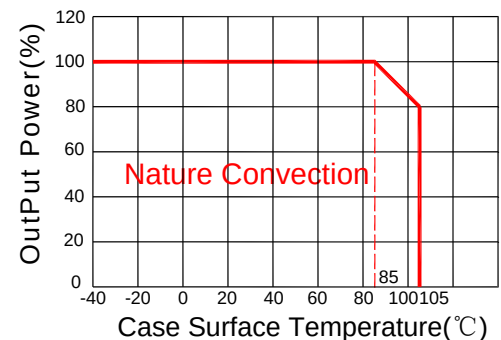

Note:

1:No suffix is standard isolation (1.5KVDC) e.g, C13DSC-15S05NP2,
*add suffix "H3" for 3KVDC isolation, e.g, C13DSC-12S09NP2H3, C13DSC-12S12NP2H3,
X = 1 or 2 or 3 for package, No suffix X package1, When X=2, package2, and so on,
e.g.C13DSC-15S05N2P2,C13DSC-24S12N3P2H3

C13DSC-2W SERIES DC DC Converter 2Watt

1.5KV & 3KV Isolated Single Output SMD14



Input Specifications

Parameters	Conditions	Min	Typ	Max	Units
Voltage Range	Vo, Io Nom		±10		%
Filter	Capacitor				

Output Specifications

Parameters	Conditions	Min	Typ	Max	Units
Voltage Tolerance	100% full load			±5	%
Short Circuit Protection	Continuous				
Line Regulation	For 1.0% OF Vin		1.2		%
Load Regulation	5V (10% To 100% F.L)		8	15	%
	9V (10% To 100% F.L)		6	10	%
	12V (10% To 100% F.L)		5	10	%
	15V (10% To 100% F.L)		4	10	%
	24V (10% To 100% F.L)		3	10	%
Ripple & Noise	BW=DC To 20MHz		75	150	mVp-p

General Specifications


Parameters	Conditions	Min	Typ	Max	Units
Isolation Resistance	500Vdc	1000			MΩ
Isolation Capacitance	Input-output, 100KHz/0.1V		20		pF
Switching Frequency	Full load, nominal input		250		KHz
Operation Temperature		-40		+105	°C
Storage Temperature		-55		+125	°C
Humidity	Non Condensing			95	%
Cooling	Free air Convection				
Case material	DAP				
MTBF	MIL-HDBK-217F@25°C	3500000			Hours
Weight	Package 1/2/3	1.2/1.2/1.28			g
Dimensions	Package 1	12.7x7.6x6.25			mm
	Package 2	12.7x7.6x6.25			mm
	Package 3	12.8x10.8x6.9			mm

Part Number

C13DSC - $\frac{12}{A}$ $\frac{S}{B}$ $\frac{12}{C}$ $\frac{N}{D}$ $\frac{3}{E}$ $\frac{P}{F}$ $\frac{2}{G}$ $\frac{2}{H}$

A:Series
B:Input Voltage
C:Single Output
D:Output Voltage
E:Unregulated(N)
F:Packge
G:Protection
H:Output Power


Tolerance Envelope Graph

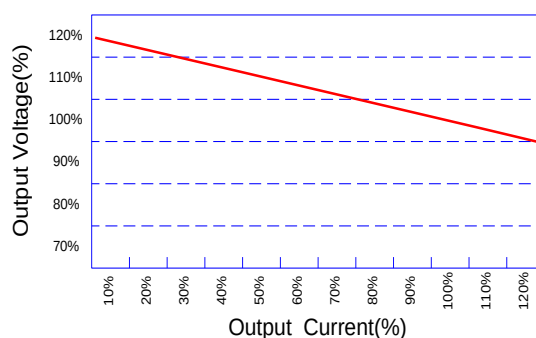

Electromagnetic Compatibility (EMC)

EMI	CE	CISPR32/EN55032 CLASS B (see Fig. 1 for recommended circuit)
	RE	CISPR32/EN55032 CLASS B (see Fig. 1 for recommended circuit)
EMS	ESD	IEC/EN61000-4-2 Air ±8kV , Contact ±4kV perf. Criteria B

Recommended Test Circuit

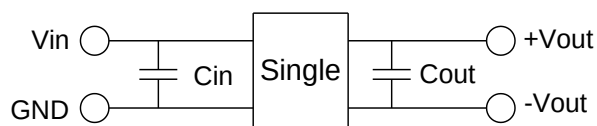

Vin	Cin	Single Vout	Cout
12Vdc	2.2μF/25V	5Vdc	10μF/16V
15Vdc	2.2μF/25V	9Vdc	2.2μF/16V
24Vdc	1μF/50V	12Vdc	2.2μF/25V
- -	- -	15Vdc	1μF/25V
- -	- -	24Vdc	1μF/50V

C13DSC-2W SERIES DC DC Converter 2Watt

1.5KV & 3KV Isolated Single Output SMD14



EMC (CLASS B) compliance circuit


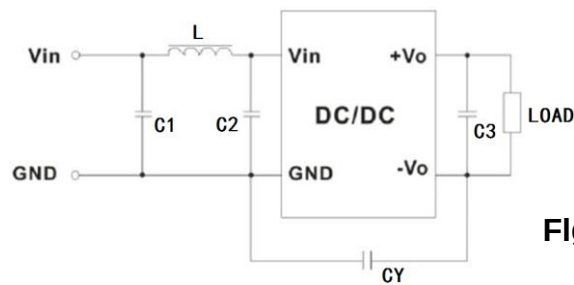


Fig.1

EMC recommended circuit value table

EMI	C1	4.7 μ F /50V
	C2	4.7 μ F /50V
	CY	1nF/4kV
	C3	Recommended Test Circuit
	L	6.8 μ H

Markings and Dimensions

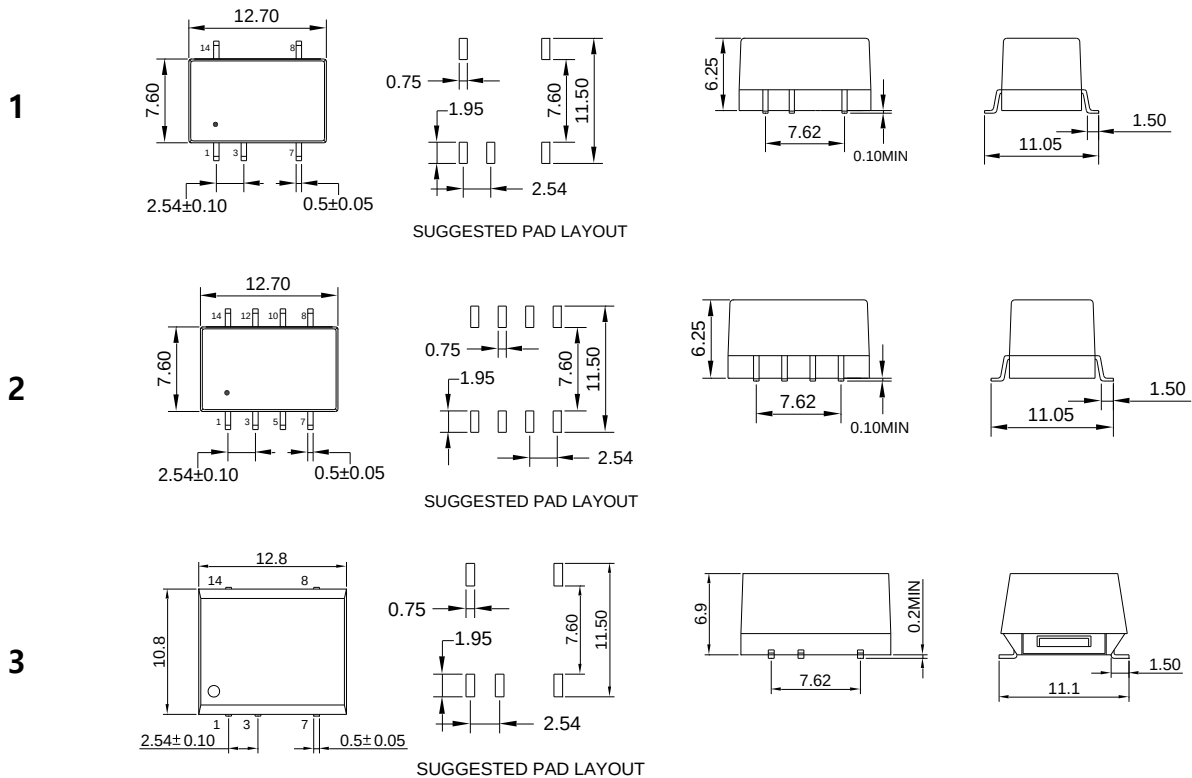

UNIT:mm Unless otherwise specified,all tolerances are ± 0.25

PIN Connection

PIN	1	3	7	8	14	Other
Package 1/3	-Vin	+Vin	-Vout	+Vout	NC	NO PIN
Package 2	-Vin	+Vin	-Vout	+Vout	NC	NC