

CND20HW Series

20W 4:1 Regulated Single & Dual output



Features

- Wide 4:1 Input Range
- Isolation Voltage up to 5000VAC
- Reinforced Insulation for 250Vrms Working Voltage
- Efficiency up to 90%
- Under Voltage Protection
- Remote On/Off Control
- Adjustable Output Voltage
- Continuous Short Circuit Protection
- Over Load Protection
- Over Voltage Protection
- Over Temperature Protection



PART NUMBER STRUCTURE

CND 20 H W - 24 05 S
(1) (2) (3) (4) (5) (6) (7)

(1) Series

(2) Watt

20 - 20 W

(3) High Isolation

(4) Wide Input Range

W - 4 : 1

(5) Input Voltage Range

24 - 9-36 V

48 - 18-75 V

(6) Output Voltage

05 - 5.0 V

12 - 12 V

15 - 15 V

(7) Output Type

S - Single Output

D - Dual Output

CND20HW Series

20W 4:1 Regulated Single & Dual output



ALL SPECIFICATIONS ARE TYPICAL AT 25°C, NOMINAL INPUT AND FULL LOAD UNLESS OTHERWISE NOTED

MODEL NUMBER	INPUT Voltage Range (VDC)	INPUT Current		OUTPUT Voltage (VDC)	OUTPUT Current		EFFICIENCY @FL (%, typ.)	Capacitive Load @FL (μF, max.)
		No-Load (mA, max.)	Full Load (mA, typ.)		Min. load (mA)	Full load (mA)		
CND20HW-2405S	9~36	15	942	5	0	4000	88.5	5000
CND20HW-2412S	9~36	15	938	12	0	1670	89	850
CND20HW-2415S	9~36	15	934	15	0	1330	89	700
CND20HW-2405D	9~36	15	969	±5	0	±2000	86	±2500
CND20HW-2412D	9~36	15	936	±12	0	±833	89	±500
CND20HW-2415D	9~36	15	937	±15	0	±667	89	±350
CND20HW-4805S	18~75	15	468	5	0	4000	89	5000
CND20HW-4812S	18~75	15	472	12	0	1670	88.5	850
CND20HW-4815S	18~75	15	462	15	0	1330	90	700
CND20HW-4805D	18~75	15	485	±5	0	±2000	86	±2500
CND20HW-4812D	18~75	15	471	±12	0	±833	88.5	±500
CND20HW-4815D	18~75	15	469	±15	0	±667	89	±350

INPUT SPECIFICATIONS						
Parameter	Conditions		Min.	Typ.	Max.	Unit
Input Voltage Range	24V Input		9	24	36	VDC
	48V Input		18	48	75	
Under Voltage Protection	24V Input	Module ON		8.2		VDC
		Module OFF		7.5		
	48V Input	Module ON		17.4		
		Module OFF		16.0		
Input Filter			Pi Type			
Input Reflected Ripple Current (1)				20		mApk-pk
Start up Time	Nominal Vin and constant resistive load			20		ms
Remote ON/OFF Control (2)	Module ON (Open Circuit)		3.0		12	VDC
	Module OFF (Short circuit pin 2 and pin 6)		0		1.2	
	OFF Idle Current			2.5		mA
	CTRL Pin Input Current				1	
Recommended input fuse (slow blow)	24V Input		4			A
	48V Input		2			
Note :						
1. Measured with a simulated source inductance of 4.7μH and a source capacitor Cin (22μF, ESR<1.0Ω at 100kHz).						
2. The remote on/off control pin is referenced to –Vin (pin2).						

CND20HW Series

20W 4:1 Regulated Single & Dual output



ABSOLUTE MAXIMUM RATINGS

Parameter	Conditions	Min.	Typ.	Max.	Unit
Input Surge Voltage (100 ms)	24V Input			50	VDC
	48V Input			100	
Soldering Temperature	1.5mm from case 10sec max.			260	°C

Note : These are stress ratings. Exposure of devices to any of these conditions may adversely affect long-term reliability.

OUTPUT SPECIFICATIONS

Parameter	Conditions		Min.	Typ.	Max.	Unit
Output Voltage Accuracy			-1.0		+1.0	%
Output Voltage Adjustability (Trim)			-10		+10	%
Line Regulation	Single Output		-0.2		+0.2	%
	Dual Output		-0.5		+0.5	
Load Regulation	From 0% to 100% Load	Single Output	-0.5		+0.5	%
		Dual Output	-1.0		+1.0	
Cross Regulation	Asymmetrical Load 25% / 100% for Dual Output		-5		+5	%
Ripple & Noise (1)	20MHz bandwidth	5V Output		50		mVpk-pk
		12V & 15V Output		75		
Over Voltage Protection (Zener diode clamp)	5V Output			6.2		VDC
	12V Output			15		
	15V Output			18		
Over Current Protection				150		% of FL
Short Circuit Protection			Indefinite (hiccup) (Automatic Recovery)			
Temperature Coefficient			-0.02		+0.02	%/°C
Maximum Capacitive Load	Minimum Vin and constant resistive load		See Table			
Transient Recovery Time	Nominal Vin and 25% load step change (75%-50%-25% of Io)	All models		250		µs
Transient Response Deviation		5V Output	-5		+5	%
		12V & 15V Output	-3		+3	
Note : 1. Measured with a 10uF ceramic capacitor.						

GENERAL SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Unit
Isolation Voltage	Input-output, and rated for 60sec	5000			VAC
Isolation Resistance	Input-output	1000			MΩ
Isolation Capacitance	Input-output		17		pF
Leakage current	240VAC, 60Hz		2.0		µA
Clearance/Creepage		8			mm
Switching Frequency			275		kHz
MTBF	MIL-HDBK-217 F @ 25°C	533			k hours
Safety Standard	IEC / EN / UL 62368-1	DK-127793-UL, E252573			
Insulation System		Reinforced Insulation			
Environmental compliance		RoHS			

CND20HW Series

20W 4:1 Regulated Single & Dual output



ENVIRONMENT SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Unit
Operating Ambient Temperature	See the Derating Curve	-40		100	°C
Maximum Case Temperature				105	°C
Thermal Impedance		13.2			°C/W
Over Temperature Protection	Case Temperature		115		°C
Storage Humidity				95	% rel. H
Storage Temperature		-55		125	°C
Cooling	Natural Convection	30-65 LFM			

EMC SPECIFICATIONS

Parameter	Standard	Condition	Criterion
Conducted Emissions	EN55032	without external components	A
Radiated Emissions	EN55032	without external components	A
ESD	IEC 61000-4-2	Air $\pm 15\text{kV}$, Contact $\pm 8\text{kV}$	A
RS	IEC 61000-4-3	20V/m	A
EFT	IEC 61000-4-4	$\pm 2\text{kV}$ with external components	A
Surge	IEC 61000-4-5	$\pm 2\text{kV}$ with external components	A
CS	IEC 61000-4-6	10Vrms	A
PFMF	IEC 61000-4-8	100A/m	A

PHYSICAL SPECIFICATIONS


Parameter	Value
Case Material	Non-conductive Black Plastic (UL94V-0 rated)
Base Material	Non-conductive Black Plastic (UL94V-0 rated)
Pin Material	$\Phi 1.0\text{mm}$ Brass Solder-coated
Potting Material	Silicone (UL94V-0 rated)
Weight	22 g, typ.
Dimensions	1.61" x 1.00" x 0.40"

CND20HW Series


20W 4:1 Regulated Single & Dual output




ELECTRICAL CHARACTERISTIC CURVES

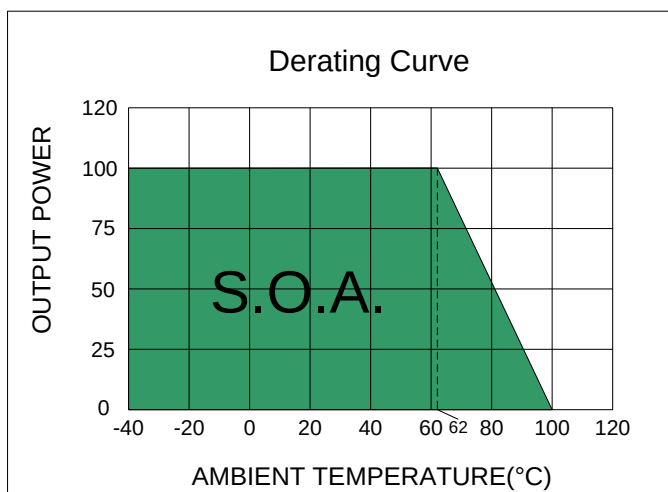

Efficiency 86% models

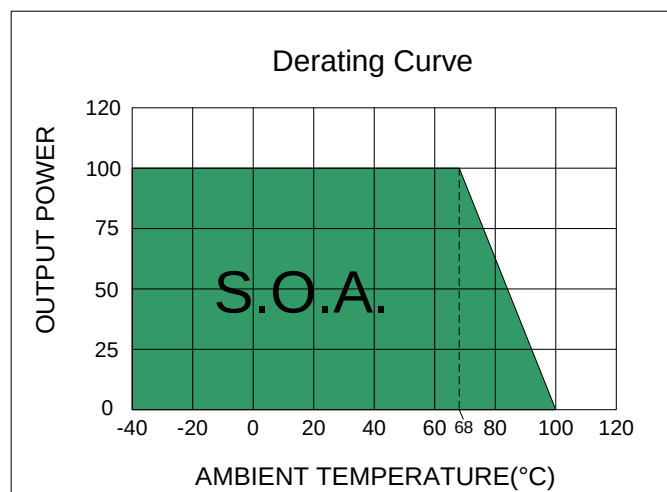

Efficiency 88.5% 、 89% models

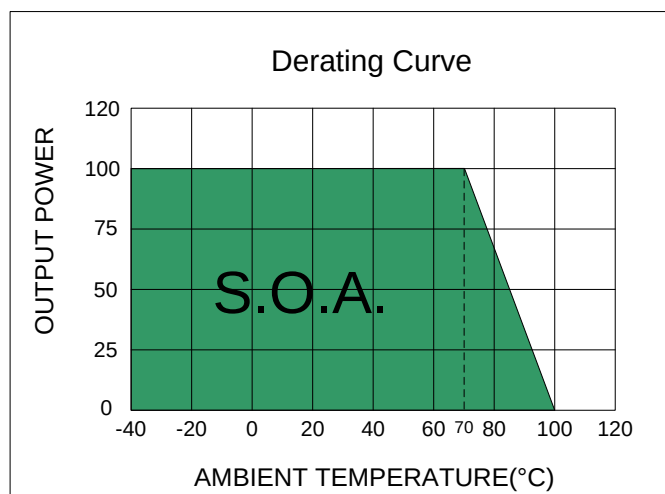


Efficiency 90% model

TEST CONFIGURATIONS

Input Reflected Ripple Current Test Step

Input reflected ripple current is measured with a source inductor L_{in} (4.7 μ H) and a source capacitor C_{in} (22 μ F, ESR<1.0 Ω at 100kHz) at nominal input and full load.

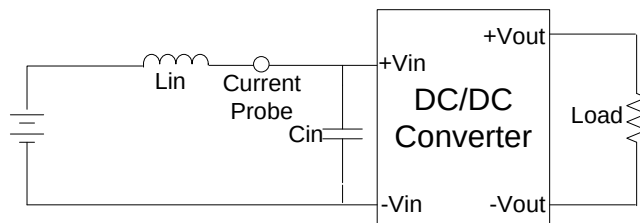

DESIGN & FEATURE CONFIGURATIONS

Over Current Protection

The module includes an internal over current protection circuit, which will endure current limiting for an unlimited duration during output over load condition. If the output current exceeds the OCP set point, the module will shut down automatically (hiccup). The module will try to restart after shut down. If the over load condition still exists, the module will shut down again.

Over Voltage Protection

The module includes an internal output over voltage protection circuit, which monitors the voltage on the output terminals. If this voltage exceeds the over voltage set point, the module will activate the control loop of internal circuit to clamp the output voltage.

Over Temperature Protection Test


The over temperature protection consists of circuitry that provides protection from thermal damage. If the temperature exceeds the over temperature threshold the module will shut down. The module will try to restart after shut down, if the over temperature condition still exists during restart, the module will shut down again. This restart trial will continue until the temperature is within specification.

Remote Module ON / OFF

Positive logic turns on the module during high logic and off during low logic. Remote module on/off can be controlled by an external switch between the CTRL terminal and -Vin terminal. For positive logic if the remote feature is not used, please leave the CTRL pin floating.

EMC Filter

The Circuit is used to meet Surge & EFT test.

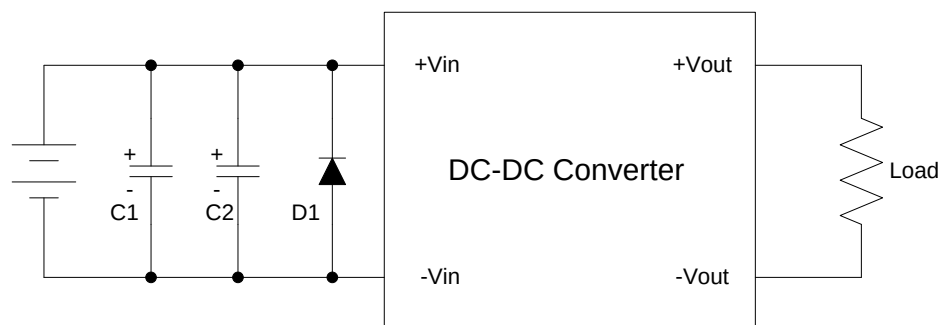


	C1 、 C2	D1
CND20HW-24XXX	NIPPON Chemi-con KY Series	SMDJ58A
CND20HW-48XXX	220uF, 100V	SMDJ120A

CND20HW Series

20W 4:1 Regulated Single & Dual output



MECHANICAL SPECIFICATIONS

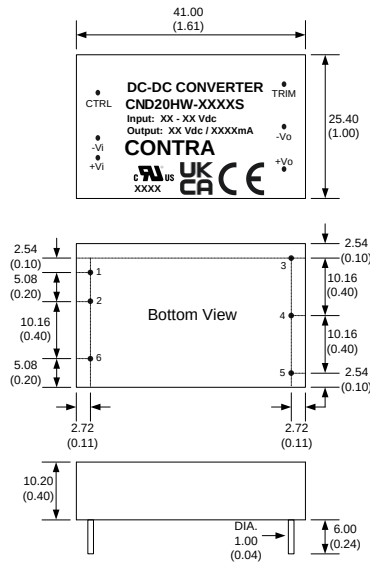


- Notes : All dimensions are typical in millimeters (inches).
1. Pin diameter: 1.0 ± 0.05 (0.04 ± 0.002)
 2. Pin pitch and length tolerance: ± 0.35 (± 0.014)
 3. Case Tolerance: ± 0.5 (± 0.02)

PIN CONNECTIONS


PIN NUMBER	SINGLE	DUAL
1	+Vin	+Vin
2	-Vin	-Vin
3	+Vout	+Vout
4	-Vout	COM
5	Trim	-Vout
6	CTRL	CTRL

EXTERNAL OUTPUT TRIMMING

Output can be externally trimmed by using the method as below. (single output models only)



RECOMMEND FOOTPRINT DETAILS

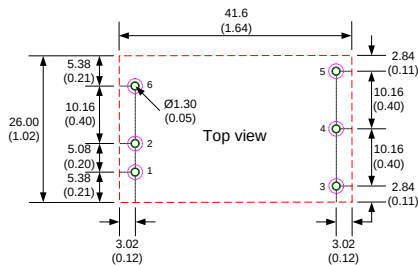

- Notes : 1. All dimensions are typical in millimeters (inches).
- Through hole (black) 1 ~ 6: $\varnothing 1.30$ (0.05)
 - Top view pad (green) 1 ~ 6: $\varnothing 1.50$ (0.06)
 - Bottom view pad (pink) 1 ~ 6: $\varnothing 2.60$ (0.10)
2. There should be at least 8mm distance between primary and secondary circuit.