


CS-DW8 SERIES 8Watt 1.6KV Isolated DC-DC Converter Single & Dual Output



FEATURES :

- 8W DIL Package
- 4:1 Wide Input Range
- 100% Burned In
- High Efficiency Up To 87%
- Customized Solutions Available
- Remote Control: On/Off
- UL94V-0 Package Material
- Operating Temperature From -40°C To +87°C
- 3 Years Warranty

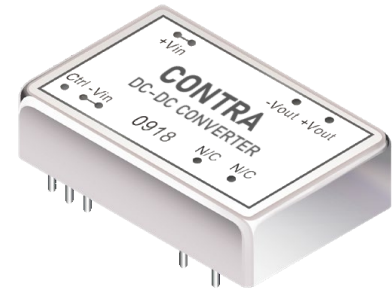


Specifications typical at TA=25°C, nominal input voltage and rated output current unless otherwise specified



Part Number	Input Voltage	Input Current (mA TYP)		Output Voltage	Output Current	Efficiency
	Vdc	No Load	Full Load	Vdc	Full Load (mA)	%TYP
CS-DW8-24S03RNL	9-36	30	392	3.3	2424	85
CS-DW8-24S05RNL	9-36	30	388	5	1600	86
CS-DW8-24S12RNL	9-36	30	383	12	666	87
CS-DW8-24S15RNL	9-36	30	383	15	533	87
CS-DW8-24D05RNL	9-36	30	392	±5	±800	85
CS-DW8-24D12RNL	9-36	30	383	±12	±333	87
CS-DW8-24D15RNL	9-36	30	383	±15	±267	87
CS-DW8-48S03RNL	18-75	20	196	3.3	2424	85
CS-DW8-48S05RNL	18-75	20	194	5	1600	86
CS-DW8-48S12RNL	18-75	20	192	12	666	87
CS-DW8-48S15RNL	18-75	20	192	15	533	87
CS-DW8-48D05RNL	18-75	20	196	±5	±800	85
CS-DW8-48D12RNL	18-75	20	192	±12	±333	87

Temperature Derating Graph

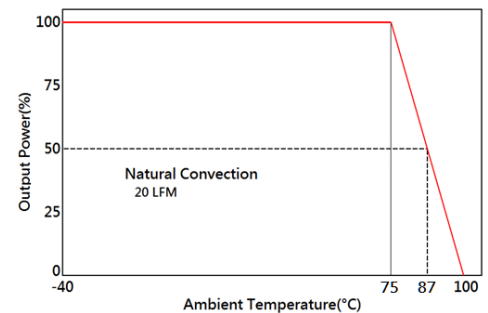

Input Specifications

Parameters	Conditions	Min	Typ	Max	Units
Voltage Types	Vo, Io Nom			4:1	
Filter			PI Network		

CS-DW8 SERIES 8Watt 1.6KV Isolated DC-DC Converter Single & Dual Output



Output Specifications

Parameters	Conditions	Min	Typ	Max	Units
Voltage Tolerance	Full load@Vin(nom.)			±2	%
Short Circuit Protection	Hiccup, automatic Recovery				
Line Regulation				±0.5	%
Load Regulation	Single Dual(Balance Load)			±0.5 ±1	%
Cross Regulation	Dual (25% To 100% Load)			±5	%
Ripple & Noise	Output:3-15V TYPES BW=DC To 20MHz			100	mVp-p
	Output > 15V TYPES BW=DC To 20MHz			1% of Vout	mVp-p
Transient response setting time	25% load step change		350		us

General Specifications



Parameters	Conditions	Min	Typ	Max	Units
Isolation Voltage			1600		Vdc
Isolation Resistance	500Vdc	1000			MΩ
Switching Frequency			400		KHz
Operating Temperature	With derating	-40		87	°C
Storage Temperature		-55		125	°C
Humidity	Non Condensing			95	%
Cooling	Natural Convection (20LFM)				
Case material	Nickel coated copper with no-conductive base				
MTBF	MIL-HDBK-217F @25°C	1500000			Hours
Weight			16.2		g
Dimensions			31.6x20.1x10.0		mm

Part Number


CS-DW8 - 12 S 03 R NL
A B C D E F

A : Series
B : Input Voltage
C : Single Output(S),Dual(D)
D : Output Voltage
E : Regulated(R)
F : RoHs Version

Recommended Test Circuit

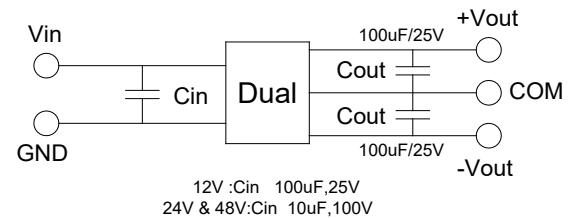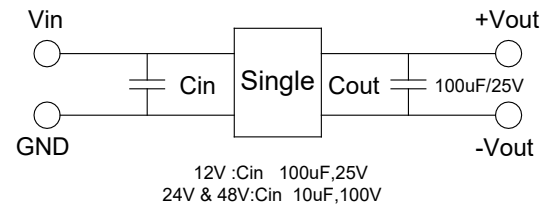

Dimensions

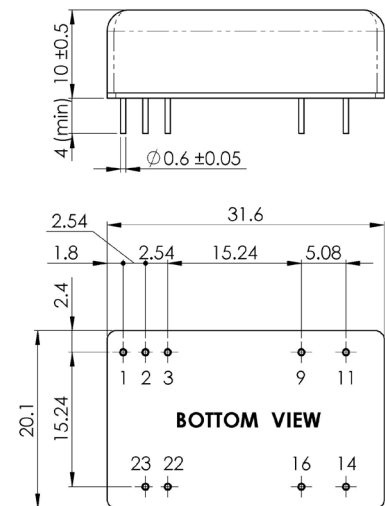

Unit : mm
Tolerance : XX.X ±0.5 , XX.XX ±0.25

PIN Assignment

Pin	1	2,3	9	11	14	16	22,23
Single	Remote ON/OFF	-Vin	NC	NC	+Vout	-Vout	+Vin
Dual	Remote ON/OFF	-Vin	Common	-Vout	+Vout	Common	+Vin