

3.2W EI38/13.6 APE3813 SERIES



FEATURES

- Two compartments bobbin
- Self-extinguishing plastics UL94V-0
- Degree of protection IP67
- Weight: 0.155kg
- Temperature class to 70 °C/B


OPTIONS

- Bulk packaging is standard
- Custom design available

COMMON APPLICATIONS


- Medical equipments
- Industrial equipments
- Industrial controls
- Test equipments
- Industrial computers
- Avionics & telecom

PHYSICAL CHARACTERISTICS

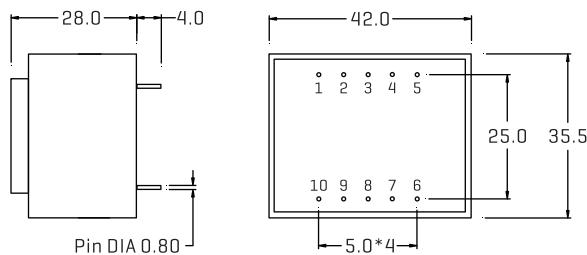

ALL DIMENSIONS IN MM

TECHNICAL INFORMATION

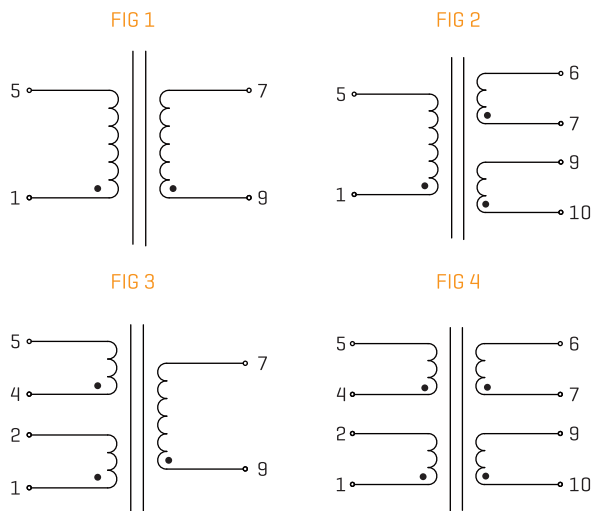

ELECTRICAL CHARACTERISTICS AT 25°C

Part Number	Primary [V]	Secondary [V/mA]	No-load voltage[V]	Fig.
APE381393	230	6/533	8.0	1
APE381394	230	9/356	12.0	1
APE381395	230	12/267	16.0	1
APE381396	230	15/214	20.0	1
APE381397	230	18/178	24.1	1
APE381398	230	24/134	32.1	1
APE381399	230	2*6/267	2*8.0	2
APE3813100	230	2*9/178	2*12.0	2
APE3813101	230	2*12/134	2*16.0	2
APE3813102	230	2*15/107	2*20.0	2
APE3813103	230	2*18/89	2*24.1	2
APE3813104	230	2*24/67	2*32.1	2
APE3813105	115	6/533	8.0	1
APE3813106	115	9/356	12.0	1
APE3813107	115	12/267	16.0	1
APE3813108	115	15/214	20.0	1
APE3813109	115	18/178	24.1	1
APE3813110	115	24/134	32.1	1
APE3813111	115	2*6/267	2*8.0	2
APE3813112	115	2*9/178	2*12.0	2
APE3813113	115	2*12/134	2*16.0	2
APE3813114	115	2*15/107	2*20.0	2
APE3813115	115	2*18/89	2*24.1	2
APE3813116	115	2*24/67	2*32.1	2
APE3813117	2*115	6/533	8.0	3
APE3813118	2*115	9/356	12.0	3
APE3813119	2*115	12/267	16.0	3
APE3813120	2*115	15/214	20.0	3
APE3813121	2*115	18/178	24.1	3
APE3813122	2*115	24/134	32.1	3
APE3813123	2*115	2*6/267	2*8.0	4
APE3813124	2*115	2*9/178	2*12.0	4
APE3813125	2*115	2*12/134	2*16.0	4
APE3813126	2*115	2*15/107	2*20.0	4
APE3813127	2*115	2*18/89	2*24.1	4
APE3813128	2*115	2*24/67	2*32.1	4